


Nova'ProBounce™

CUSHIONED HARD COURT COMFORT


INSTALLATION SEQUENCE

A unique, patented system for repairing cracked and deteriorating hard court surfaces.

A proven long term solution, ProBounce may also be installed over a prepared and compacted crushed stone or fast-dry base. ProBounce also reduces costs PLUS provides the benefits of a cushioned surface.

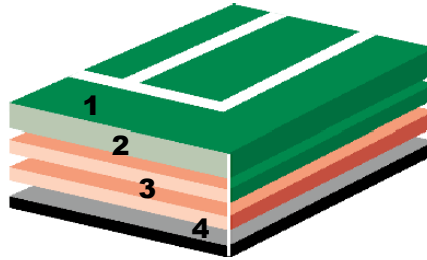

1. Flexible Acrylic Surfacing System with Game Lines
2. Stratum Layer with Mineral Aggregate In-Fill Bound with a Flexible Polymer Resin
3. Thermally and Dimensionally Stable Fabric Laminated with Moisture Resistant Eco-Friendly Urethane Coatings
4. Cracked Asphalt or Concrete Base

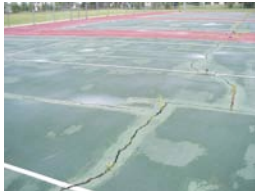

1. BEFORE CONSTRUCTION



2. BASE REPAIRS LEVELING



3. SEAMING OF STRATUM LAYER OVER BASE.



4. STRATUM SEAMED



5. IN-FILLING STRATUM




6. FINISHING STRATUM IN-FILL



7. IN-FILLED STRATUM



8. SPRAYING WITH POLYMER

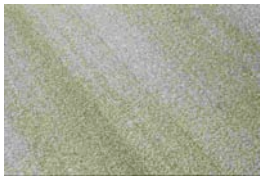

9. SEALED SYSTEM.



10. SPOT SANDING IMPERFECTIONS



11. APPLYING ACR SEAL



12. APPLY FLEXIBLE COLOR.



RESIDENTIAL



CLUB



MUNICIPAL



RETIREMENT COMMUNITY



2807 Walker Road. Chattanooga, TN. 37421. 800.835.0033 F: 423.499.8882

info@ngisports.com / www.ngisports.com